

FLO-VU[®] Sight Flow Indicators

**Guaranteed Not To Leak*




**High Pressure & Temperature Rated
excellent safety & reliability**


FLO-VU®

*Guaranteed Bubble-Tight

**When used within Ethylene design conditions*

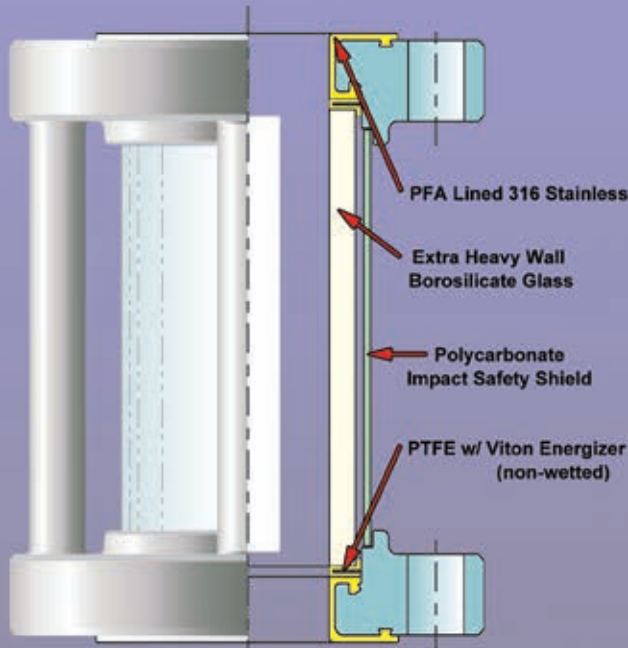

Model 360L - PFA Lined

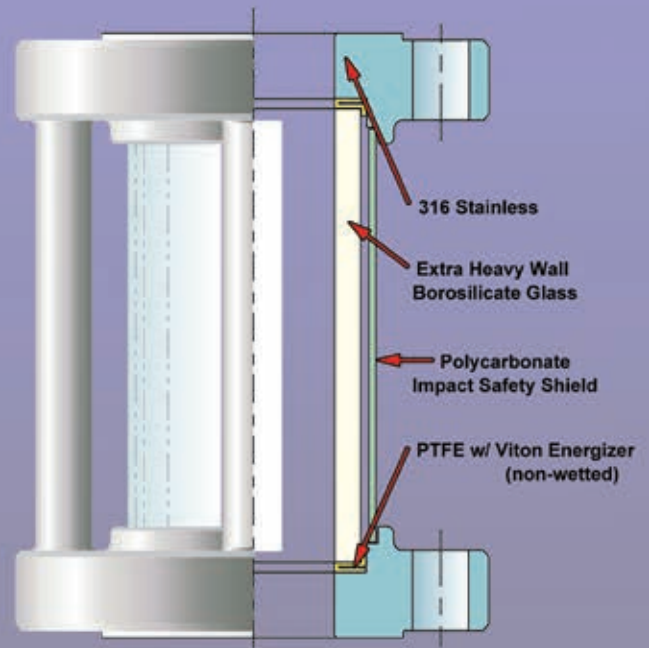

Model 360M - Unlined Version

For more information visit www.ethylene.com

- Size Range

1" - 12" up to 50" Long

- Pressure Rating

Full Vacuum to 150 psig

- Operating Temperature

(-) 20°F to (+)350°F (-29°C to +177°C)

- 100% Tested

Each unit is subjected to a 225 psig hydrostatic pressure test and a 150 psig helium bubble test before shipment.

- Lexan® Impact Shield

A Lexan outer safety shield with an unobstructed 360° view is provided on FLO-VU® 360L and 360M to protect the glass from external damage and to provide scatter protection.

Standard Features

- PFA and Glass Wetted Surfaces

PFA and borosilicate glass wetted surfaces offer high temperature with maximum corrosion resistance and absolute product purity.

- Energized Seal Design

PTFE / Viton Energizer gasket provides a secure, bubble-tight seat even in applications with extreme thermal cycling.

- Rugged Construction

All FLO-VU® sight indicators have heavy-duty tie rods and flanges to limit deformation under heavy external loads and reduce glass stress.

**FLO-VU®
Standard**
PFA Lined or Unlined 316 s.s.



**FLO-VU®
Durcor-62™ Composite
Flanges**



**FLO-VU®
Double-Sure™
Double Contained**



**FLO-VU®
Pure-Vu™
Sanitary Tri-Clamp**



ETHYLENE®
an ANDRONACO INDUSTRIES company

4855 Broadmoor Ave. - Kentwood, MI 49512 Ph (616)554-0900 FAX (616)554-3464
www.ethylene.com

Flovu-2 0112-0813-01